

# SD 125 EX Sounder horn

SIL2 compliant as IEC 61508 & IEC 61511





The flameproof SD125 sounder is ATEX / IECEx certified for use in potentially explosive atmospheres and provides loud warning sounds to signal alarms in tough hazardous area applications. It quickly alerts personnel to potential dangers or signals the need for immediate action in emergency situations. It is constructed from 316L stainless steel.

**ATEX / IECEx Certification:** ATEX Zone 1 and Zone 2 Certified for gas / vapour and Zone 21 and Zone 22 compliant for dust / powder applications. SIL2 compliant as IEC 61508 & IEC 61511.

**Application:** Oil and gas, chemical, petrochemical, pharmaceutical, marine and offshore applications.

**Key features:** The explosion proof sounder (horn) can be set with up to three tones among 59 prerecorded tones (according to user control system). Pausing of the signal can be done by an external switch. Robust and highly reliable, the Ex horn / sounder is designed for corrosive environments and hazardous areas. The housing is made of 316L stainless steel covered with UV resistant paint. The mounting bracket is 316L Stainless steel.

**Options:** A range of accessories is available to customise this ATEX / IECEx sounder / horn. These include pipe mounting brackets, sunshades, tag and duty labels and other accessories.

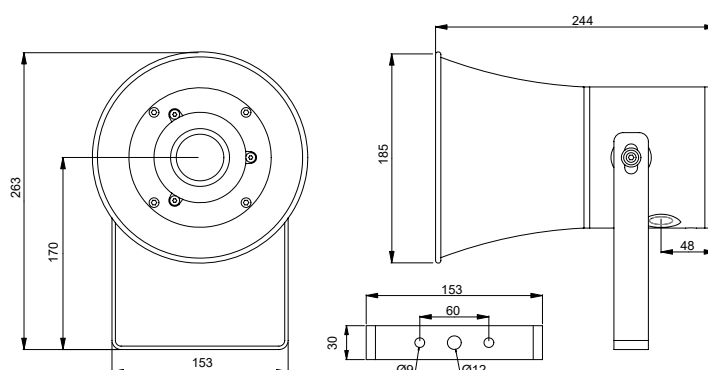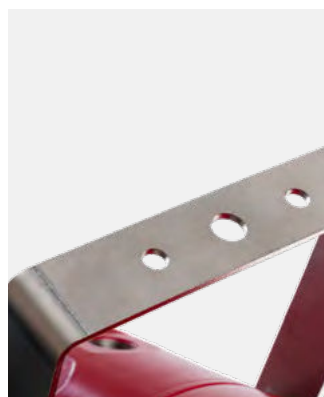


Phone: +44 (0)1752 333 933 | E-mail: [sales@ex-techsignalling.com](mailto:sales@ex-techsignalling.com) | Website: [www.ex-techsignalling.com](http://www.ex-techsignalling.com)

Ex-tech Signalling Bell Close, Plympton, Devon, PL7 4JH, UK

Please note that whilst effort has been made to ensure the accuracy of this datasheet, Ex-tech Signalling will not assume liability for the use thereof. Ex-tech Signalling reserves the right to improve specifications without prior notice, please refer to our website for updated information or contact our local sales representative.

# SD 125 EX Sounder horn

SIL2 compliant as IEC 61508 &amp; IEC 61511

MATERIAL	• <b>Enclosure and bracket:</b> Stainless steel 316L		
COLOUR	• RED : RAL3001 • BLACK : RAL9005 • ORANGE : RAL2010	• YELLOW : RAL1018 • GREEN : RAL6032	• BLUE : RAL5005 • GREY : RAL7038
INGRESS PROTECTION	• IP66/67		
AMBIENT TEMPERATURE FOR OPERATION	• <b>T6</b> = - 40°C ~ + 55°C , <b>T5</b> = - 40°C ~ + 60°C, <b>T4</b> = - 40°C ~ + 70°C		
CERTIFICATION	• <b>Nemko</b> 13 ATEX 1562X, IECEX NEM 13.0032X		
EX CODE	 • II 2 GD Ex db IIC T4 ~ T6 Gb • Ex tb IIIC T135°C ~T85°C		
STANDARD	• EN / IEC 60079-0, EN / IEC 60079-1, EN / IEC 60079-31		
ATEX AREA ZONE	• <b>Gas zone:</b> 1 & 2 <b>Dust zone:</b> 21 & 22		
AMBIENT HUMIDITY*	• until 95%*		
POWER SUPPLY	• 12-48V DC • 115-230V AC NOMINAL (100 - 240V AC Range)		
RATED IMPULSE WITHSTAND VOLTAGE	• 1kV following IEC 61000-4-5		
CONSUMPTION	• Adjustable from 5 to 25 W (factory setting 20W)		
CURRENT CONSUMPTION	• 0.5 to 1 A		
SIGNALLING TYPE	• 59 tones siren. Specific customer tones can be recorded in factory		
NOISE LEVEL	• Until 115 dB at 1 m		
CABLES ENTRY	• 2 x M20, 1 x M25 + 1 x M20, 1 x 1/2" NPT + 1 x M20, 1 x 3/4" NPT + 1 x M20		
TERMINAL	• From 22 to 14 AWG - from 0.50 mm <sup>2</sup> to 2.5 mm <sup>2</sup>		
NET WEIGHT	• 7.9 Kg		



\* = without runoff - \*\* = optional - cable gland and blind plug not provided

Phone: +44 (0)1752 333 933 | E-mail: [sales@ex-techsignalling.com](mailto:sales@ex-techsignalling.com) | Website: [www.ex-techsignalling.com](http://www.ex-techsignalling.com)

Ex-tech Signalling Bell Close, Plympton, Devon, PL7 4JH, UK

Please note that whilst effort has been made to ensure the accuracy of this datasheet, Ex-tech Signalling will not assume liability for the use thereof. Ex-tech Signalling reserves the right to improve specifications without prior notice, please refer to our website for updated information or contact our local sales representative.

# SD 125 EX Sounder horn

SIL2 compliant as IEC 61508 &amp; IEC 61511

Product	Certification	Supply	Duty label	Tag label	Connection	Housing colour	Standard
SD	125	DC	N	Y	A	RD	N



SD = SOUNDER

125 = HAZARDOUS AREA

126 = NON-CERTIFIED

DC = 12 - 48V DC

AC = 100 - 240V AC

Y = YES (SEE LIST)

N = NO

Y = YES (SEE LIST)

N = NO

A = 2 x M20 x 1.5

B = 1 x M25 x 1.5 (VIA ADAPTOR) + 1 x M20

C = 1 x 1/2" NPT (VIA ADAPTOR) + 1 x M20

D = 1 x 3/4" NPT (VIA ADAPTOR) + 1 x M20

Additional adaptors can be supplied as well as blanking plugs and cable glands, see below.

RD ● = RED (STD)

YW ● = YELLOW

BU ● = BLUE

BL ● = BLACK

GN ● = GREEN

GY ● = GREY

OJ ● = ORANGE

OR ○ = OTHER

CONDUIT ACCESSORIES	
M20 316L St. St Exd conduit plug	SPARE3060009
M25 St. St. conduit adaptor	SPARE3060105
1/2" NPT St. St. conduit adaptor	SPARE3060108
3/4" NPT St. St. conduit adaptor	SPARE3060107
St. St Exd cable gland 7-12mm	SPARE3060108
St. St Exd cable gland 10-16mm	SPARE3060109

CONDUIT ACCESSORIES	
M20 NPB Exd conduit plug	SPARE3060008
M25 NPB conduit adaptor	SPARE3060003
1/2" NPT NPB conduit adaptor	SPARE3060001
3/4" NPT NPB conduit adaptor	SPARE3060002
NPB Exd cable gland 7-12mm	SPARE3060019
NPB Exd cable gland 10-16mm	SPARE3060018

Phone: +44 (0)1752 333 933 | E-mail: [sales@ex-techsignalling.com](mailto:sales@ex-techsignalling.com) | Website: [www.ex-techsignalling.com](http://www.ex-techsignalling.com)

Ex-tech Signalling Bell Close, Plympton, Devon, PL7 4JH, UK

Please note that whilst effort has been made to ensure the accuracy of this datasheet, Ex-tech Signalling will not assume liability for the use thereof. Ex-tech Signalling reserves the right to improve specifications without prior notice, please refer to our website for updated information or contact our local sales representative.